MARATHON HEATER



Made in USA

AER MEATERS







* Heater has been cut to show core



STANDARD CONSTRUCTION **Epoxy Seal** 1/2", 5/8" or 3/4 diameter 304 Stainless Steel Sheath. Nickel-Chromium Coils. Copper Tee High temperature leads or 3 pin connector. 120 Volt and 240 Volt

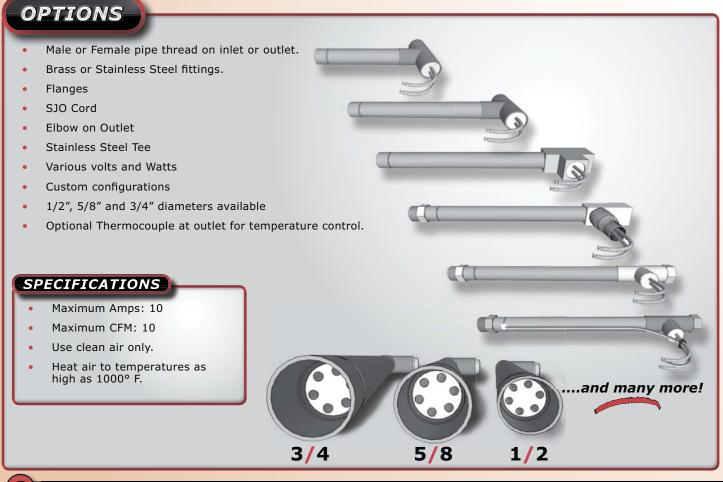

APPLICATIONS Marathon Heater manufactures and stocks several variations of 1/2" diameter air heaters for: Heat Staking Shrink Fitting Plastic Welding Laminating Sealing Drying

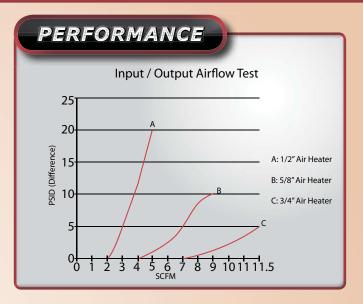

STOCK LIST


THE FOLLOWING HEATERS ARE IN STOCK FOR IMMEDIATE DELIVERY

Stock #	Volts	Watts	Min. Flow Rate (CFM)	Connection	Diameter	Length	Dimensions
AH50050R	120	400	4	36" Leads	.500		
AH50050T	240	400	4	36" Leads	.500		
AH50050V	120	600	5.5	36" Leads	.500		
AH50050X	240	600	5.5	36" Leads	.500		
AH50050S	120	400	4	3 prong socket	.500		
AH50050U	240	400	4	3 prong socket	.500		
AH50050W	120	600	5.5	3 prong socket	.500		
AH50050Y	240	600	5.5	3 prong socket	.500		

Fittings can be added to any of the above heaters.

- Add the following numbers to the part number when ordering.
- For example: AH50050R-1 for a 120 volt, 400 watt with 1/8 FPT fitting on inlet.


Prefix	Description				
-1	1/8" FPT fitting on inlet				
-2	3/8" MPT fitting on inlet				
-3	1/8" FPT fitting on outlet				
-4	3/8" MPT fitting on outlet				
-5	1/8" FPT fitting on inlet, 1/8" FPT on outlet				
-6	3/8" MPT fitting on inlet, 3/8" MPT on outlet				
-7	1/8" FPT fitting on inlet, 3/8 MPT on outlet				
-8	3/8" MPT fitting on inlet, 1/8" FPT on outlet.				

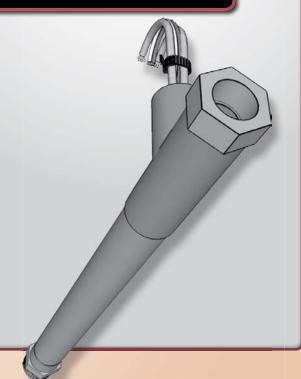





Calculator

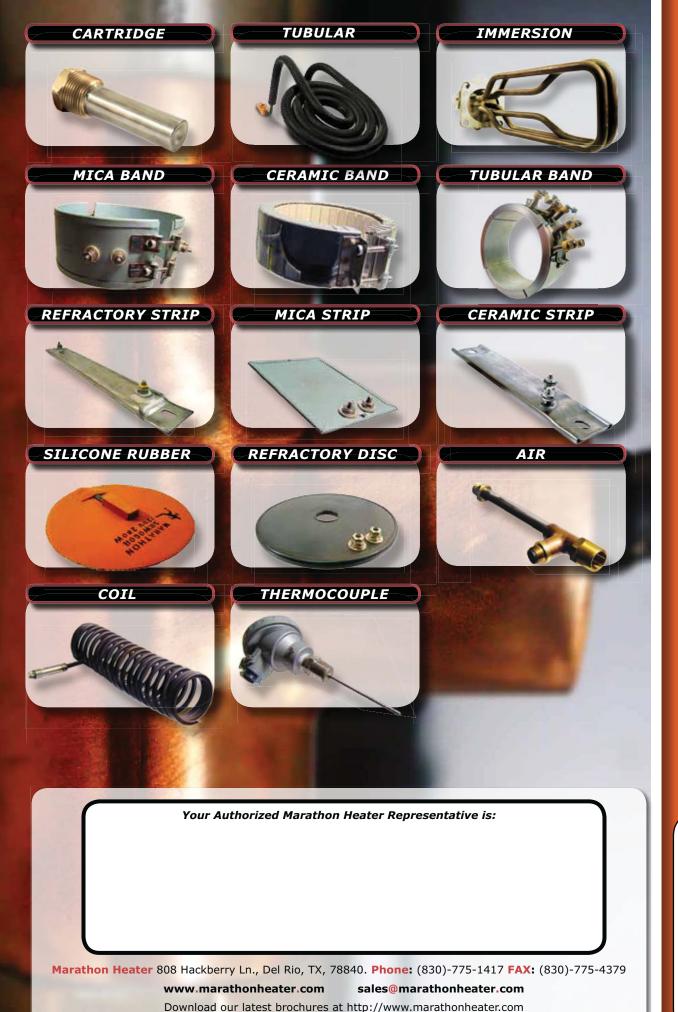

BR-AIR-12